
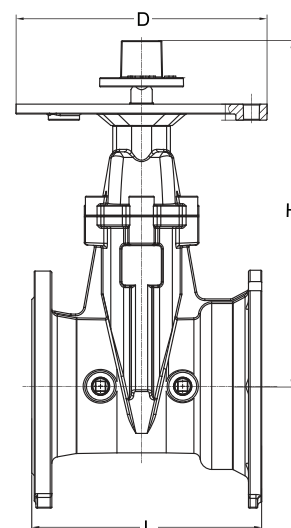


FEATURES & SPECIFICATIONS

- Non-rising stem
- Stainless steel stem
- Valve conforms to AWWA C515 / BS5163
- Fusion bonded epoxy coated interior and exterior RAL3002
- Mechanical joint ends to AWWA C111 / A21.11
- Working pressure : 365psi
- Working temperature : -10°C ... 120°C
- All valves provided with 2" (50mm) operating nut



MATERIALS LIST

| Name | Material |
|---------------|--|
| Body | Ductile Iron ASTM A536 65-45-12 |
| Wedge Disc | Ductile Iron ASTM A536 65-45-12 + EPDM |
| Disc Nut | Bronze ASTM B62 |
| Stem | Stainless Steel AISI 304 |
| Gasket | EPDM |
| Bonnet | Ductile Iron ASTM A536 65-45-12 |
| Thrust Collar | Bronze ASTM B62 |
| Gland | Ductile Iron ASTM A536 65-45-12 |
| Wrench Nut | Ductile Iron ASTM A536 65-45-12 |
| Post Plate | Ductile Iron ASTM A536 65-45-12 |

DIMENSIONS (inch/mm)

| Size | 3"/80 | 4"/100 | 6"/150 | 8"/200 | 10"/250 | 12"/300 |
|------|-----------|-----------|-----------|-----------|-----------|-----------|
| L | 9.49/241 | 10.00/254 | 11.50/292 | 12.52/318 | 14.76/375 | 14.88/378 |
| H | 11.54/293 | 12.83/326 | 16.54/420 | 19.92/506 | 24.02/610 | 27.99/711 |
| D | 12.01/305 | 12.01/305 | 12.01/305 | 12.01/305 | 12.01/305 | 12.01/305 |

NET WEIGHT (kg) & CRATE QTY (pcs)

| Size | 3"/80 | 4"/100 | 6"/150 | 8"/200 | 10"/250 | 12"/300 |
|-----------|-------|--------|--------|--------|---------|---------|
| N.W. | 21.63 | 26.14 | 40.48 | 65.97 | 101.76 | 147.50 |
| Crate Qty | 9 | 9 | 9 | 9 | 4 | 2 |