
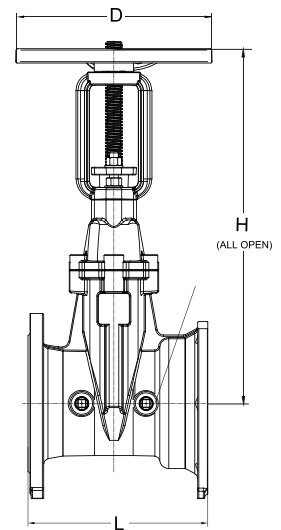


**FEATURES & SPECIFICATIONS**

- Rising stem, Outside Screw & Yoke (OS&Y)
- Stainless steel stem
- Valve conforms to AWWA C515 / BS5163
- Fusion bonded epoxy coated interior and exterior RAL3002
- Flange drilled to ANSI B16.1 Class 125 / ANSI B16.5 Class 150 / EN1092-2 PN16 / BS10 Table D / Table E
- Mechanical joint ends to AWWA C111 / A21.11
- Working pressure : 365psi
- Working temperature : -10°C ... 120°C



**MATERIALS LIST**

Name	Material
Body	Ductile Iron ASTM A536 65-45-12
Wedge	Ductile Iron ASTM A536 65-45-12 + EPDM
Wedge Nut	Stainless Steel AISI 304
Stem	Stainless Steel AISI 304/420
Bonnet	Ductile Iron ASTM A536 65-45-12
Gasket	EPDM
Packing	Graphite
Stem Nut	Bronze ASTM B62
Handwheel	Ductile Iron ASTM A536 65-45-12

**DIMENSIONS (inch/mm)**

Size	3"/80	4"/100	6"/150	8"/200	10"/250	12"/300
L	8.74/222	9.51/241.5	11/279.5	12.00/305	13.88/352.50	14.45/367
H	18.32/463	20.55/522	28.15/715	35.94/913	44.02/1118	51.18/1300
D	8.66/220	8.66/220	12.05/306	14.57/370	16.54/420	17.52/445

**NET WEIGHT (kg) & CRATE QTY (pcs)**

Size	3"/80	4"/100	6"/150	8"/200	10"/250	12"/300
N.W.	18.17	22.72	39.61	73.21	113.31	170.50
Crate Qty	16	16	9	6	4	2