
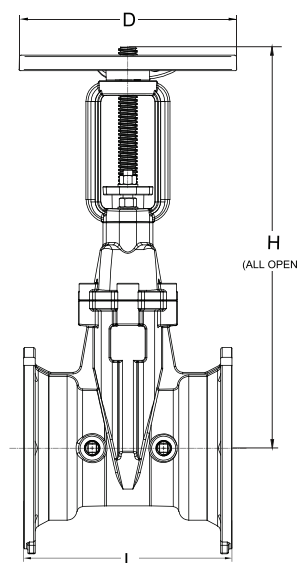


### FEATURES & SPECIFICATIONS

- Rising stem, Outside Screw & Yoke (OS&Y)
- Stainless steel stem
- Valve conforms to AWWA C515 / BS5163
- Fusion bonded epoxy coated interior and exterior RAL3002
- Mechanical joint ends to AWWA C111 / A21.11
- Working pressure : 365psi
- Working temperature : -10°C ... 120°C



### MATERIALS LIST

Name	Material
Body	Ductile Iron ASTM A536 65-45-12
Wedge	Ductile Iron ASTM A536 65-45-12 + EPDM
Wedge Nut	Stainless Steel AISI 304
Stem	Stainless Steel AISI 304/420
Bonnet	Ductile Iron ASTM A536 65-45-12
Gasket	EPDM
Packing	Graphite
Stem Nut	Bronze ASTM B62
Handwheel	Ductile Iron ASTM A536 65-45-12

### DIMENSIONS (inch/mm)

Size	3"/80	4"/100	6"/150	8"/200	10"/250	12"/300
<b>L</b>	9.49/241	10.00/254	11.50/292	12.52/318	14.76/375	14.88/378
<b>H</b>	18.23/463	20.55/522	28.15/715	35.94/913	44.02/1118	51.18/1300
<b>D</b>	8.66/220	8.66/220	12.05/306	14.57/370	16.54/420	17.52/445

### NET WEIGHT (kg) & CRATE QTY (pcs)

Size	3"/80	4"/100	6"/150	8"/200	10"/250	12"/300
<b>N.W.</b>	18.36	23.05	31.66	62.3	109.67	157.00
<b>Crate Qty</b>	16	16	9	6	4	2